Preface

We would like to present, with great pleasure, the inaugural volume-8, Issue-2, February 2022, of a scholarly journal, *International Journal of Engineering Research & Science*. This journal is part of the AD Publications series *in the field of Engineering, Mathematics, Physics, Chemistry and science Research Development*, and is devoted to the gamut of Engineering and Science issues, from theoretical aspects to application-dependent studies and the validation of emerging technologies.

This journal was envisioned and founded to represent the growing needs of Engineering and Science as an emerging and increasingly vital field, now widely recognized as an integral part of scientific and technical investigations. Its mission is to become a voice of the Engineering and Science community, addressing researchers and practitioners in below areas

Chemical Engineering	
Biomolecular Engineering	Materials Engineering
Molecular Engineering	Process Engineering
Corrosion Engineering	
Civil Engineering	
Environmental Engineering	Geotechnical Engineering
Structural Engineering	Mining Engineering
Transport Engineering	Water resources Engineering
Electrical Engineering	
Power System Engineering	Optical Engineering
Mechanical Engineering	
Acoustical Engineering	Manufacturing Engineering
Optomechanical Engineering	Thermal Engineering
Power plant Engineering	Energy Engineering
Sports Engineering	Vehicle Engineering
Software Engineering	
Computer-aided Engineering	Cryptographic Engineering
Teletraffic Engineering	Web Engineering
System Engineering	
Mathematics	
Arithmetic	Algebra
Number theory	Field theory and polynomials
Analysis	Combinatorics
Geometry and topology	Topology
Probability and Statistics	Computational Science
Physical Science	Operational Research
Physics	
Nuclear and particle physics	Atomic, molecular, and optical physics
Condensed matter physics	Astrophysics
Applied Physics	Modern physics
Philosophy	Core theories

Chemistry	
Analytical chemistry	Biochemistry
Inorganic chemistry	Materials chemistry
Neurochemistry	Nuclear chemistry
Organic chemistry	Physical chemistry
Other Engineering Areas	
Aerospace Engineering	Agricultural Engineering
Applied Engineering	Biomedical Engineering
Biological Engineering	Building services Engineering
Energy Engineering	Railway Engineering
Industrial Engineering	Mechatronics Engineering
Management Engineering	Military Engineering
Petroleum Engineering	Nuclear Engineering
Textile Engineering	Nano Engineering
Algorithm and Computational Complexity	Artificial Intelligence
Electronics & Communication Engineering	Image Processing
Information Retrieval	Low Power VLSI Design
Neural Networks	Plastic Engineering

Each article in this issue provides an example of a concrete industrial application or a case study of the presented methodology to amplify the impact of the contribution. We are very thankful to everybody within that community who supported the idea of creating a new Research with IJOER. We are certain that this issue will be followed by many others, reporting new developments in the Engineering and Science field. This issue would not have been possible without the great support of the Reviewer, Editorial Board members and also with our Advisory Board Members, and we would like to express our sincere thanks to all of them. We would also like to express our gratitude to the editorial staff of AD Publications, who supported us at every stage of the project. It is our hope that this fine collection of articles will be a valuable resource for *IJOER* readers and will stimulate further research into the vibrant area of Engineering and Science Research.

Mukesh Arora

(Chief Editor)

Dr. M. Varatha Vijayan

Annauniversity Rank Holder, Commissioned Officer Indian Navy, Ncc Navy Officer (Ex-Serviceman Navy), Best Researcher Awardee, Best Publication Awardee, Tamilnadu Best Innovation & Social Service Awardee From Lions Club.

Dr. Mohamed Abdel Fatah Ashabrawy Moustafa

PhD. in Computer Science - Faculty of Science - Suez Canal University University, 2010, Egypt.

Assistant Professor Computer Science, Prince Sattam bin AbdulAziz University ALkharj, KSA.

Prof.S.Balamurugan

Dr S. Balamurugan is the Head of Research and Development, Quants IS & CS, India. He has authored/co-authored 35 books, 200+ publications in various international journals and conferences and 6 patents to his credit. He was awarded with Three Post-Doctoral Degrees - Doctor of Science (D.Sc.) degree and Two Doctor of Letters (D.Litt) degrees for his significant contribution to research and development in Engineering.

Dr. Mahdi Hosseini

Dr. Mahdi did his Pre-University (12th) in Mathematical Science. Later he received his Bachelor of Engineering with Distinction in Civil Engineering and later he Received both M.Tech. and Ph.D. Degree in Structural Engineering with Grade "A" First Class with Distinction.

Dr. Anil Lamba

Practice Head – Cyber Security, EXL Services Inc., New Jersey USA.

Dr. Anil Lamba is a researcher, an innovator, and an influencer with proven success in spearheading Strategic Information Security Initiatives and Large-scale IT Infrastructure projects across industry verticals. He has helped bring about a profound shift in cybersecurity defense. Throughout his career, he has parlayed his extensive background in security and a deep knowledge to help organizations build and implement strategic cybersecurity solutions. His published researches and conference papers has led to many thought provoking examples for augmenting better security.

Dr. Ali İhsan KAYA

Currently working as Associate Professor in Mehmet Akif Ersoy University, Turkey.

Research Area: Civil Engineering - Building Material - Insulation Materials Applications, Chemistry - Physical Chemistry – Composites.

Dr. Parsa Heydarpour

Ph.D. in Structural Engineering from George Washington University (Jan 2018), GPA=4.00.

Dr. Heba Mahmoud Mohamed Afify

Ph.D degree of philosophy in Biomedical Engineering, Cairo University, Egypt worked as Assistant Professor at MTI University.

Dr. Aurora Angela Pisano

Ph.D. in Civil Engineering, Currently Serving as Associate Professor of Solid and Structural Mechanics (scientific discipline area nationally denoted as ICAR/08"–"Scienza delle Costruzioni"), University Mediterranea of Reggio Calabria, Italy.

Dr. Faizullah Mahar

Associate Professor in Department of Electrical Engineering, Balochistan University Engineering & Technology Khuzdar. He is PhD (Electronic Engineering) from IQRA University, Defense View, Karachi, Pakistan.

Prof. Viviane Barrozo da Silva

Graduated in Physics from the Federal University of Paraná (1997), graduated in Electrical Engineering from the Federal University of Rio Grande do Sul - UFRGS (2008), and master's degree in Physics from the Federal University of Rio Grande do Sul (2001).

Dr. S. Kannadhasan

Ph.D (Smart Antennas), M.E (Communication Systems), M.B.A (Human Resources).

Dr. Christo Ananth

Ph.D. Co-operative Networks, M.E. Applied Electronics, B.E Electronics & Communication Engineering Working as Associate Professor, Lecturer and Faculty Advisor/ Department of Electronics & Communication Engineering in Francis Xavier Engineering College, Tirunelveli.

Dr. S.R.Boselin Prabhu

Ph.D, Wireless Sensor Networks, M.E. Network Engineering, Excellent Professional Achievement Award Winner from Society of Professional Engineers Biography Included in Marquis Who's Who in the World (Academic Year 2015 and 2016). Currently Serving as Assistant Professor in the department of ECE in SVS College of Engineering, Coimbatore.

Dr. PAUL P MATHAI

Dr. Paul P Mathai received his Bachelor's degree in Computer Science and Engineering from University of Madras, India. Then he obtained his Master's degree in Computer and Information Technology from Manonmanium Sundaranar University, India. In 2018, he received his Doctor of Philosophy in Computer Science and Engineering from Noorul Islam Centre for Higher Education, Kanyakumari, India.

Dr. M. Ramesh Kumar

Ph.D (Computer Science and Engineering), M.E (Computer Science and Engineering).

Currently working as Associate Professor in VSB College of Engineering Technical Campus, Coimbatore.

Dr. Maheshwar Shrestha

Postdoctoral Research Fellow in DEPT. OF ELE ENGG & COMP SCI, SDSU, Brookings, SD Ph.D, M.Sc. in Electrical Engineering from SOUTH DAKOTA STATE UNIVERSITY, Brookings, SD.

Dr. D. Amaranatha Reddy

Ph.D. (Postdocteral Fellow, Pusan National University, South Korea), M.Sc., B.Sc. : Physics.

Dr. Dibya Prakash Rai

Post Doctoral Fellow (PDF), M.Sc., B.Sc., Working as Assistant Professor in Department of Physics in Pachhuncga University College, Mizoram, India.

Dr. Pankaj Kumar Pal

Ph.D R/S, ECE Deptt., IIT-Roorkee.

Dr. P. Thangam

PhD in Information & Communication Engineering, ME (CSE), BE (Computer Hardware & Software), currently serving as Associate Professor in the Department of Computer Science and Engineering of Coimbatore Institute of Engineering and Technology.

Dr. Pradeep K. Sharma

PhD., M.Phil, M.Sc, B.Sc, in Physics, MBA in System Management, Presently working as Provost and Associate Professor & Head of Department for Physics in University of Engineering & Management, Jaipur.

Dr. R. Devi Priya

Ph.D (CSE), Anna University Chennai in 2013, M.E, B.E (CSE) from Kongu Engineering College, currently working in the Department of Computer Science and Engineering in Kongu Engineering College, Tamil Nadu, India.

Dr. Sandeep

Post-doctoral fellow, Principal Investigator, Young Scientist Scheme Project (DST-SERB), Department of Physics, Mizoram University, Aizawl Mizoram, India- 796001.

Dr. Roberto Volpe

Faculty of Engineering and Architecture, Università degli Studi di Enna "Kore", Cittadella Universitaria, 94100 – Enna (IT).

Dr. S. Kannadhasan

Ph.D (Smart Antennas), M.E (Communication Systems), M.B.A (Human Resources).

Research Area: Engineering Physics, Electromagnetic Field Theory, Electronic Material and Processes, Wireless Communications.

Mr. Amit Kumar

Amit Kumar is associated as a Researcher with the Department of Computer Science, College of Information Science and Technology, Nanjing Forestry University, Nanjing, China since 2009. He is working as a State Representative (HP), Spoken Tutorial Project, IIT Bombay promoting and integrating ICT in Literacy through Free and Open Source Software under National Mission on Education through ICT (NMEICT) of MHRD, Govt. of India; in the state of Himachal Pradesh, India.

Mr. Tanvir Singh

Tanvir Singh is acting as Outreach Officer (Punjab and J&K) for MHRD Govt. of India Project: Spoken Tutorial - IIT Bombay fostering IT Literacy through Open Source Technology under National Mission on Education through ICT (NMEICT). He is also acting as Research Associate since 2010 with Nanjing Forestry University, Nanjing, Jiangsu, China in the field of Social and Environmental Sustainability.

Mr. Abilash

MTech in VLSI, BTech in Electronics & Telecommunication engineering through A.M.I.E.T.E from Central Electronics Engineering Research Institute (C.E.E.R.I) Pilani, Industrial Electronics from ATI-EPI Hyderabad, IEEE course in Mechatronics, CSHAM from Birla Institute Of Professional Studies.

Mr. Varun Shukla

M.Tech in ECE from RGPV (Awarded with silver Medal By President of India), Assistant Professor, Dept. of ECE, PSIT, Kanpur.

Mr. Shrikant Harle

Presently working as a Assistant Professor in Civil Engineering field of Prof. Ram Meghe College of Engineering and Management, Amravati. He was Senior Design Engineer (Larsen & Toubro Limited, India).

Zairi Ismael Rizman

Senior Lecturer, Faculty of Electrical Engineering, Universiti Teknologi MARA (UiTM) (Terengganu) Malaysia Master (Science) in Microelectronics (2005), Universiti Kebangsaan Malaysia (UKM), Malaysia. Bachelor (Hons.) and Diploma in Electrical Engineering (Communication) (2002), UiTM Shah Alam, Malaysia.

Mr. Ronak

Qualification: M.Tech. in Mechanical Engineering (CAD/CAM), B.E.

Presently working as a Assistant Professor in Mechanical Engineering in ITM Vocational University, Vadodara. Mr. Ronak also worked as Design Engineer at Finstern Engineering Private Limited, Makarpura, Vadodara.

Table of Contents

Synthesis and Characterization of Hybrid Metal Matrix Composites (MMCs) Reinforced With Silicon Carbide (SiC) and Aluminium Oxide (Al$_2$O$_3$)

Monika Chandel[1*], Sachin Kaushik[2], Manoj Singh[3]

[*1]M.tech Student: Department of Mechanical Engineering, GRD IMT, Dehradun, Uttarakhand, India
[2,3]Asst.Professor Department of Mechanical Engineering, GRD IMT, Dehradun, Uttarakhand, India
*Corresponding Author : Monika Chandel

Abstract— *This work present Metal matrix composites (MMCs) constitute process which improved properties including high specific strength; specific modulus, damping capacity and good wear resistance compared to unreinforced alloys. When analyses were carried out, two reinforcements namely silicon carbide (SiC) and aluminium oxide (Al$_2$O$_3$) were used for production of hybrid metal matrix composites. The two reinforcements were ball milled in order produce as single entity of these reinforcements. The reinforcement was varied from 0%, 2%, 4%, and 6% to produce hybrid metal matrix composites. All the composites were produced by stir casting. The mechanical properties of the metal matrix composites were investigated. The microstructure and X ray diffraction study was carried out. Similarly, Vickers hardness test, Tensile strength test, Toughness test were also used to investigate the metal matrix composites. After analyses it was found that the Al$_2$O$_3$ and SiC particles were uniformly distributed throughout the metal matrix. The tensile strength and hardness of Al$_2$O$_3$ and SiC reinforcement aluminium composites improved with the increase in volume fraction of nanoparticles and toughness decreases with the increasing volume fraction of reinforcement.*

Keywords— *Metal matrix composites, Nanoparticles, reinforcement, Silicon carbide and aluminium oxide, Vickers hardness, X-ray diffraction.*

I.   INTRODUCTION

Aluminium & its alloys offer a extensive range of properties that can be engineered accurately to the demands of specific applications, such as in aerospace, advanced nuclear reactors, surface coating and metal/air batteries, through the choice of alloy, temper condition and fabrication process. By utilizing various combinations of its advantageous properties like strength, lightness, corrosion resistance, recyclability and formability, aluminium is being employed in an ever- increasing number of applications. It is good strength to weight ratio, light weight, low density etc, so having such a wide application it attracts more to researchers, and secondly Aluminium shows excellent improvement in its properties on being reinforced with some material. In the given below literature review emphasis is given on the various Aluminium alloys and their work on the different parameters such as mechanical and metallurgical characterization.

II.   MATERIALS & METHODS

2.1   Materials

Aluminium alloy 6101 T6 has been taken as the base material, silicon carbide (SiC) and aluminium oxide (Al$_2$O$_3$) as reinforced material.

2.2   Methods

In this metal matrix composites two reinforcements silicon carbide & aluminium oxide used for production of hybrid metal matrix composites. The two reinforcements were ball milled to produce as single entity .The reinforcement was varied from 0%, 2%, 4%, and 6% to produce hybrid metal matrix composites. The composites were produced by stir casting. Then afterword metallurgical and mechanical properties of the metal matrix composites were investigated by the method of

microstructure and X ray diffraction .And Similarly for mechanical properties Vickers hardness test, Tensile strength test, Toughness test were also used. It was found that the Al_2O_3 & SiC particles were uniformly distributed throughout the metal matrix. The tensile strength and hardness of Al_2O_3 and SiC reinforcement aluminium composites improved with the increase in volume fraction of nanoparticles and toughness decreases with the increasing volume fraction of reinforcement.

III.   RESULTS AND DISCUSSION

In this we have study mechanical properties (Toughness, Tensile strength and Hardness) of all hybrid composites are compared on the basis of results obtained from testing are discussed in detail. And also microstructure observation is done for all hybrid composites.

3.1   Microstructure

3.1.1   Optical Microscope Analysis

The microstructure of matrix aluminum alloy and various hybrid composites reinforced with 2 to 6 wt% of SiC&Al_2O_3 are shown in Fig. 1 (a-d). The microstructure was carried out using an Olympus microscope in order to find out the volume fractions of the reinforcing particles (SiC&Al_2O_3) & porosity.
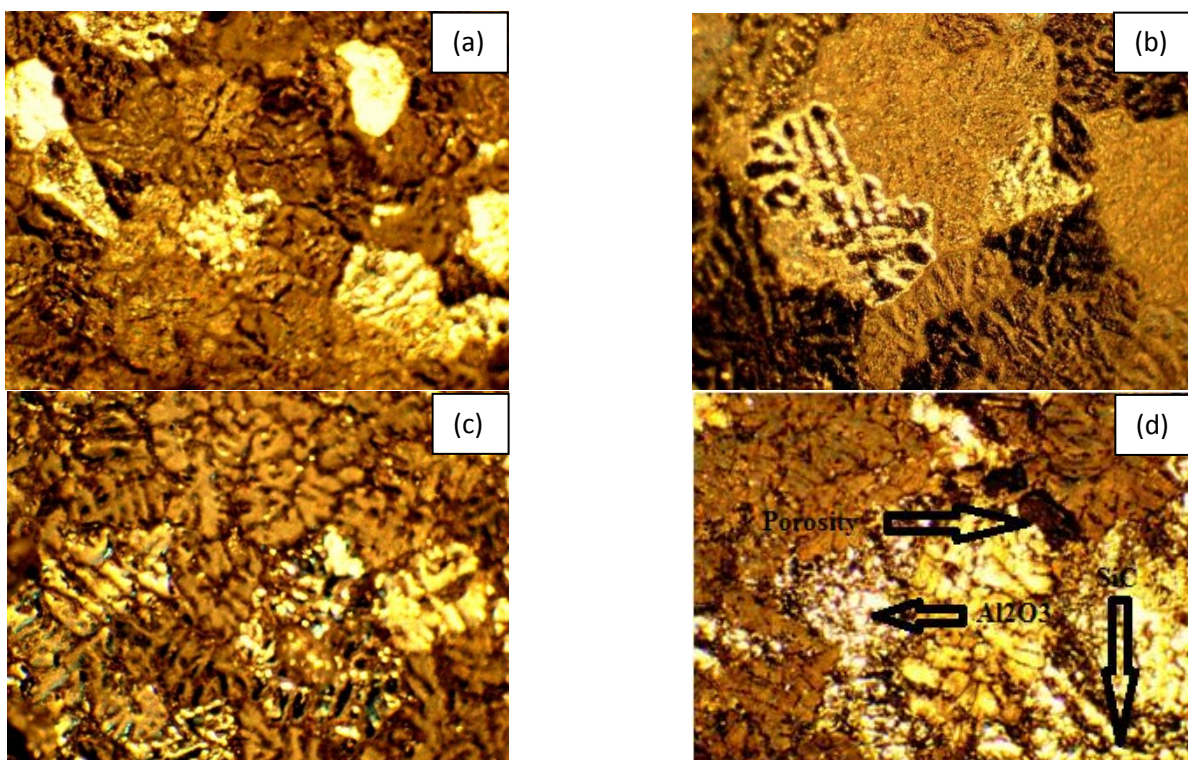

FIGURE 1: Micrographs of Al 6101 T6 and Reinforced Composite with Different Percentage of Reinforcement: (a) Al 6101 T6; (b) 2% SiC and Al_2O_3; (c) 4% SiC and Al_2O_3; (d) 6 % SiC and Al_2O_3

Aluminium alloy 6101 T6 contains Aluminium, Boron, Chromium, Copper, Iron, Magnesium, Manganese, Silicon and Zinc. The entire elements which are present in this alloy are visualized very clearly. As the % of reinforcement increases the area fraction also increases as evident from optical micrographs shown in Fig 1 (a-d).The microscopic analysis of these shows that the SiC and Al_2O_3 reinforcements are uniformly distributed in the metal matrix. At lower weight % of reinforcement i.e. 2% and 4 % microstructure was more homogeneous than at 6% which was found disorganized due to increased porosity.

On the other hand, the presence of porosity around the SiCp and Al_2O_3p reinforcements is evident. It is observed that the porosity has been pronounced more around Al_2O_3p particle reinforcement than the area around SiC particle reinforcement. It is clearly evident from the micrograph that the porosity increases with increasing volume fractions of the particulate reinforcement. Further, porosity is mainly located around the Al_2O_3p particles than around SiC particles. This may be due to wetting nature of SiC and Al_2O_3. Wetting is important in the bonding or adherence of two materials.

Wetting is the ability of a liquid metal to maintain solid surface in contact, resulting from intermolecular interactions when the two are brought together. The degree of wettability is determined by a force balance between adhesive and cohesive forces. Adhesive forces between a liquid and solid cause a liquid drop to spread across the surface. Cohesive forces within the liquid cause the drop to ball up and avoid contact with the surface.

3.1.2   X ray Diffraction Analysis

XRD is a material characterization technique that is used for analyzing the various stages present in the alloy and lattice structure of a material. In this study XRD &energy dispersive spectrometry analysis are applied to get information about the interface between the reinforcement and matrix material. XRD analysis was done on Metal Matrix Material using Phillips X-pert type Diffractometer and the values lies between 20 to 80°.
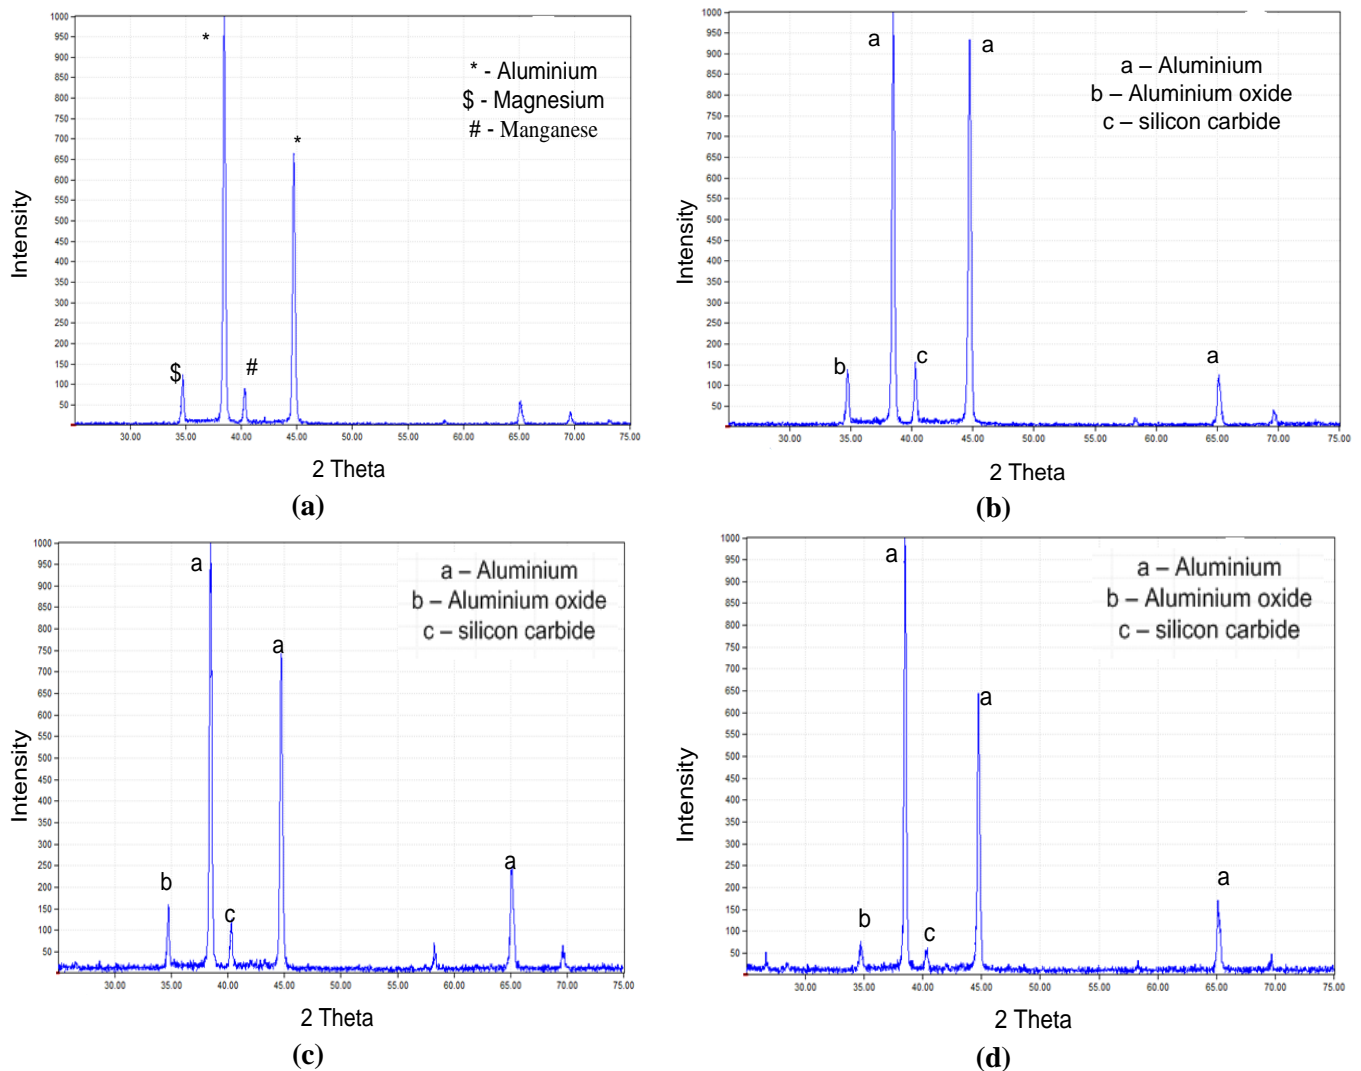

FIGURE 2: XRD Pattern of (a) Al 6101 T6; (b) 2% SiC and Al$_2$O$_3$; (c) 4% SiC and Al$_2$O$_3$ (d) 6 % SiC and Al$_2$O$_3$

The XRD results confirm presence of SiC& Al$_2$O$_3$ within the Al matrix of hybrid composite. In this result the presence of aluminium having large peak and SiC and Al$_2$O$_3$ in minor peaks. It is also evident from the XRD pattern that the SiC and Al$_2$O$_3$ particle did not react with Aluminium matrix and produce any other compound. Any other compound except SiC and Al$_2$O$_3$ was not found. And various other phases were also found in composites as follow:

1. Mg$_{1.13}$ Fe$_{0.8}$ Mn$_{.03}$ Al$_{0.14}$ Si$_2$ O$_6$ (Magnesium Iron Manganese Aluminium Silicate)

2. Mg$_{3.37}$ Fe$_{0.38}$ Al6.$_{09}$ Si$_{4.11}$ B$_{0.43}$ O$_{21.26}$ (Magnesium Iron Aluminium Boron Silicate Hydroxide)

3. Si$_{2.98}$ Al$_{6.81}$ B.$_{98}$ O$_{18}$ (Silicon Aluminium Boron Oxide)

3.2　　　Mechanical Properties

3.2.1　　　Vickers Hardness Analysis

Hardness is a measure of how resistant solid matter in various kinds of permanent shape change when a compressive force is applied. Hardness of composites is found higher than the base alloy. Further, hardness increases with increase in weight % of reinforcement particles to the base alloy. The hybrid Composite reinforced with Silicon carbide (SiC) and Aluminium oxide (Al_2O_3) showed a significant increase in hardness. Fig 3 shows the variation of hardness of composite with wt % of reinforcement particle.
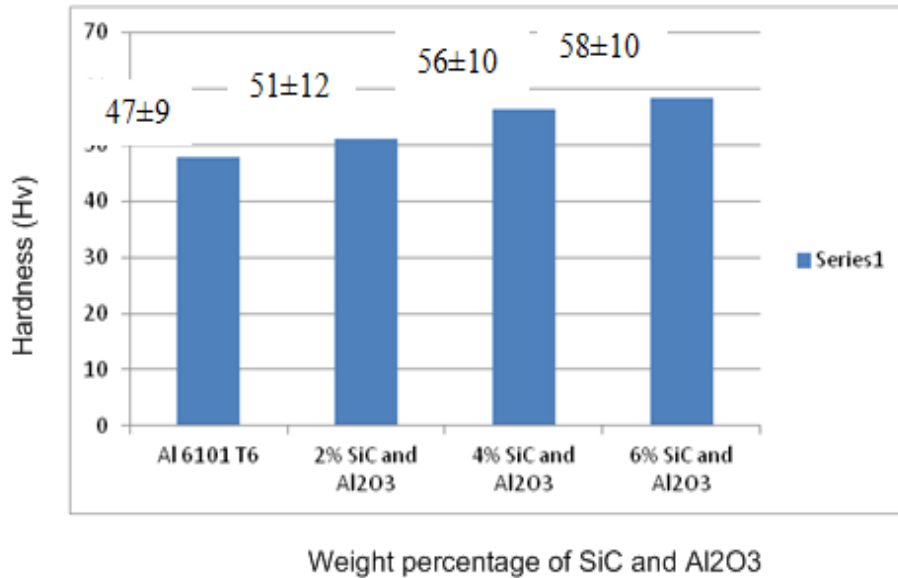

FIGURE 3: Variation of Micro hardness with wt. % Variation of SiC and Al_2O_3

The hardness of composite increases with the increasing amount of reinforcement. The addition of 0% to 6% reinforcement resulted in the increase of the hardness by 6.7%, 17.5% and 21.7 respectively in the 2, 4, and 6 wt.% of SiC and Al_2O_3. The increase in hardness after addition of reinforcement particles is due to the fact that aluminium oxide (Al_2O_3) has high wear resistance while silicon carbide has excellent hardness and high strength.

3.2.2　　　Tensile Properties Analysis

Ultimate tensile strength (UTS), often shortened to tensile strength (TS) or ultimate strength, is the maximum stress that a material can withstand while being stretched or pulled before necking, which is when the specimen's cross-section starts to significantly contracts.
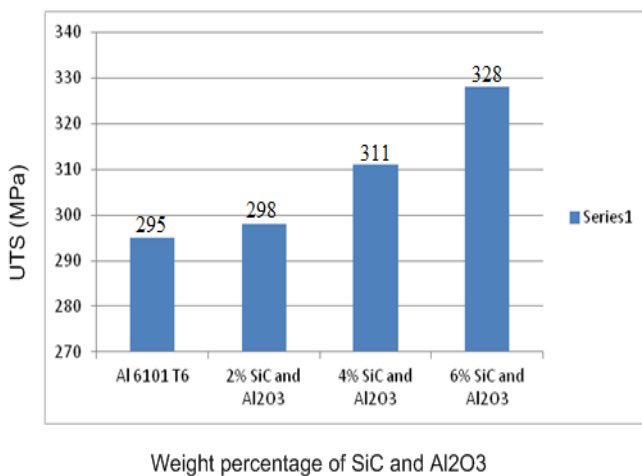

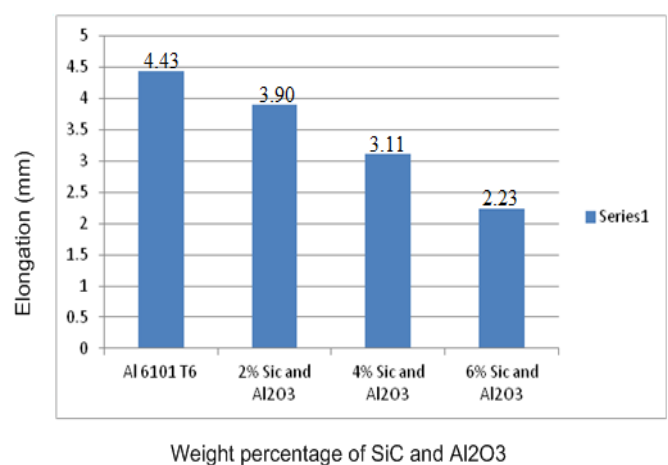**FIGURE 4 Variations of UTS with wt. % of SiC and Al_2O_3**

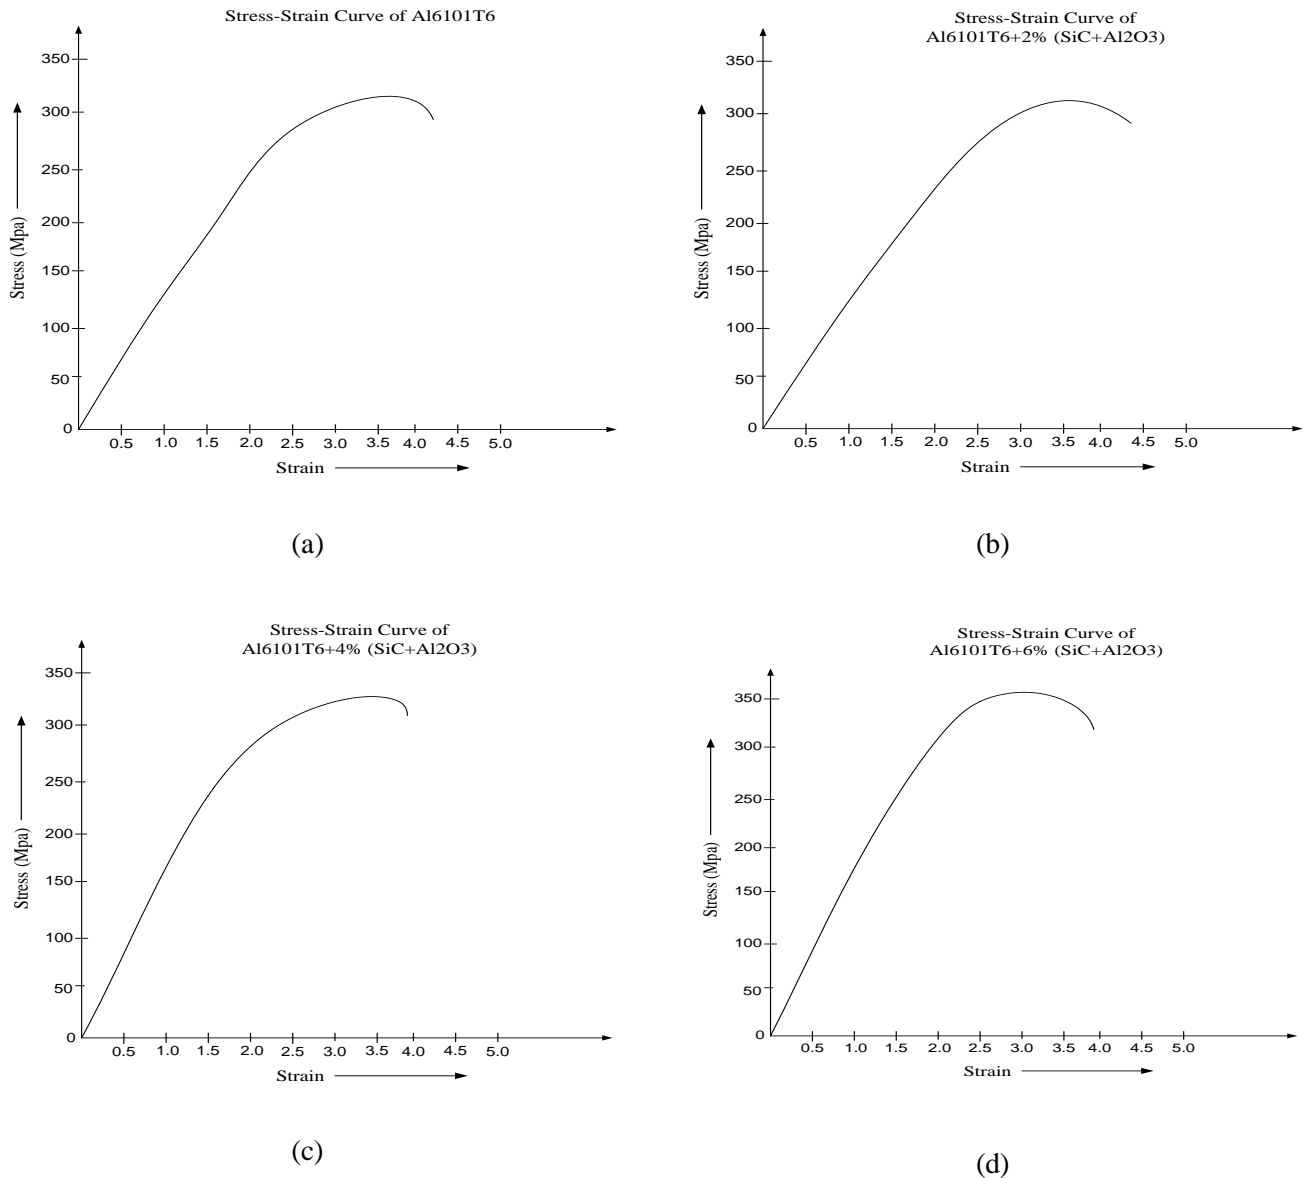**FIGURE 5 Variation of Elongation (mm) with wt. % of SiC and Al_2O_3**

FIGURE 6: Stress Strain Curve for (a) Al 6101 T6 (b) 2% SiC and Al$_2$O$_3$ (c) 4% SiC and Al$_2$O$_3$ (d) 6 % SiC and Al$_2$O$_3$

From the above data, it is clear that the tensile strength of developed hybrid composite is greater than the unreinforced A6101T6 alloy. The increase in the tensile strength can be attributed to higher resistance to applied tensile load due to the presence of strongly bonded SiC and Al$_2$O$_3$ reinforcement in the base metal and increased dislocation density near matrix reinforcement interface. The tensile strength of unreinforced aluminum matrix was lower than that of hybrid composite. Further, addition of SiC and Al$_2$O$_3$ reinforcement 2- 6% to aluminium matrix increased the tensile strength by 1% to 11%. This can be attributed to more homogeneous microstructure and higher number of SiC and Al$_2$O$_3$ reinforcement particles. High density of reinforcement is believed to delay crack propagation. The percentage elongation was observed to reduce with the increase in wt % of SiC and Al$_2$O$_3$ from 2 to 6 wt%. It is because of brittle phase of the reinforcement. The tensile results are in good agreement with hardness and elongation results.

3.3   Impact Test Analysis

The Charpy Impact test also known as Charpy V − notch test, is a standardized high strain rate test which determines the amount of energy absorbed by the material during fracture. This absorbed energy is the measure of given material's toughness. The result shown in the Fig 7.
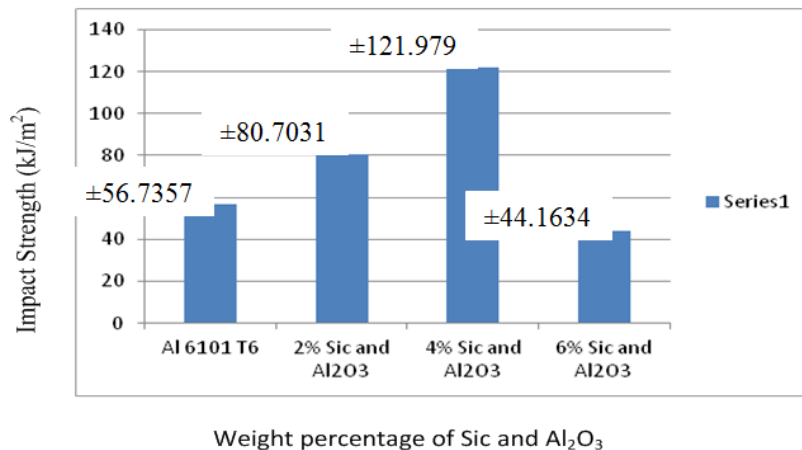
FIGURE 7: Comparison of Impact Strength with % Variation of SiC and Al$_2$O$_3$

From the above results it can be concluded that addition of SiC and Al$_2$O$_3$ reinforcement up to 4% increases toughness and beyond which toughness decreases. The highest increase in toughness is 114% for 4% reinforcement and same may be attributed to favorable combination of high tensile strength and fairly good elongation. The 22% decrease in toughness of sample containing 6% reinforcement can be attributed to lower ductility due to higher density of hard and brittle reinforcing particles and porosity. It may also happened due to the exists of brittle phases, the failure features as cracking and void in reinforcement, interface cracking and interface deboning as well as matrix damage result in the decreases of fracture toughness.

IV.   CONCLUSION

The present investigation was aimed to enhance the metallurgical (microstructure), mechanical (hardness, tensile strength and toughness) properties of Al 6101 T6 aluminium base alloy with varying wt.% of SiC and Al$_2$O$_3$ from 0 wt.% to 6 wt.%. Four types of composite materials were produced by Stir Casting process by varying the wt% of SiC and Al$_2$O$_3$ from 0 wt% to 6 wt. % in Al 6101 T6 aluminium base alloy and the following conclusions are made.

- The hardness of composite increases with the increasing amount of reinforcement. The addition of 0% to 6% reinforcement resulted in the increase of the hardness by 6.7%, 17.5% and 21.7 respectively in the 2, 4, and 6 wt. % of SiC and Al$_2$O$_3$.

- And also it is found that the tensile strength of unreinforced aluminum matrix was lower than that of hybrid composite. Further, addition of SiC and Al$_2$O$_3$ reinforcement 2-6% to aluminium matrix increased the tensile strength by 1% to 11%.

- It is found that elongation decreases with increase in particle percentage, which confirms that Silicon Carbide and Aluminium Oxide together increases brittleness.

- It was examined that with the addition of SiC and Al$_2$O$_3$ reinforcement up to 4% increases toughness and beyond which toughness decreases. The highest increase in toughness is 114% for 4% reinforcement and the 22% decrease in toughness of sample containing 6% reinforcement can be attributed to lower ductility due to higher density of hard and brittle reinforcing particles and porosity.

- The microscopic analysis of these specimens shows that the SiCp and Al$_2$O$_3$p reinforcements are uniformly distributed in the metal matrix. At lower weight % of reinforcement i.e. 2% and 4 % microstructure was more homogeneous than at 6% which was found disorganized due to increased porosity.

- Also XRD results confirm the presence of SiC and Al$_2$O$_3$ within the Al matrix of hybrid composite.

REFERENCES

[1]   http://www.usesof.net/uses-of-aluminum.html
[2]   The Aluminum Association, Inc. 900 19[th] street, N.W. Washington, D.C. 2006 (202) 862-5100.
[3]   http://www.azom.com/article.aspx?ArticleID=310

[4]   Properties and Selection Nonferrous Alloys and Special- Purpose Material, ASM Hand Book, 1990, Vol. 2.

[5]   Book of Material Science by S.L.Kakani and AmitKakani. www.esab.ca/ca/en/education/blog/understanding-thealuminium-alloy-designation-system.cfm, The Aluminium Association, Inc.www.calm-aluminium.com.au.

[6]   Manufacturing Engineering and Technology Book by SeropeKalpaljian, Steven R. Schimid.

[7]   M.K. Surappa, J. Mater. Proc.Tech. 63 (1997) 325±333.

[8]   HaiZhi Ye, Xing Yang Liu, Review of Recent Studies in Magnesium Matrix Composites, Journal of Materials Science 39(2004) 6153 – 6171.

[9]   A. Devaraju, A. Kumar. A. Kumaraswamy, B. Kotiveerachari, Influence of Reinforcements (SiC and Al_2O_3) and Rotational Speed on Wear and Mechanical Properties of Aluminum Alloy 6061-T6 Based Surface Hybrid Composites Produced Via Friction Stir Processing,Materials and Design 51 (2013) 331–341.

[10] A.Mazahery; H.Abdizadeh; H.R. Baharvandi,Development of High Performance A356/nano-Al_2O_3 Composites, Material Science and Engineering; A 518 (2009) 61-64.

[11] Ravinder Kumar, Suresh Dhiman, A Study of Sliding Wear Behaviors of Al-7075 Alloy and Al-7075 Hybrid Composite by Response Surface Methodology Analysis, Materials and Design 50 (2013) 351–35.

[12] E.Mohammad Sharifi; F.Karimzadeh; M.H.Enayati, Fabrication and Evaluation of Mechanical and Tribological Properties of Boron Carbide Reinforced Aluminium Matrix Nanocomposites, Material Science and Design; 32(2011)3263-3272.

[13] David Raja Selvam, Robinson Smart, D.S. Dinaharan, Synthesis and Characterization Of Al6061-Fly Ashp-SiCp Composites by Stir Casting and Compocasting Methods, Energy Procedia 34 (2013) 637 – 646.

[14] A. Alizadeh; E.Taheri-Nassaj, Mechanical Properties and Wear Behaviour of Al-2wt% Cu Alloy Composites Reinforced by B4c Nanoparticles and Fabricated by Mechanical Milling and Hot Extrusion, Materials Characterization; 67 (2012) 119-128.

[15] DevarajuAruria, Kumar Adepua, KumaraswamyAdepub, KotiveerachariBazavadaa, Wear and Mechanical Properties of 6061-T6 Aluminum Alloysurface Hybrid Composites [(Sic + Gr) and (SiC + Al_2O_3)] Fabricated by Friction Stir Processing,J Mater Res Technol. 2013;2(4):362–369.

[16] M.R. Rosenberger; C.E. Schvezov; E. Forlerer,Wear of Different Aluminium Matrix Composites Under Conditions that Generate a Mechanically Mixed Layer, Wear 259 (2005) 590-601.

[17] BekirSadıkUnlu,Investigation of Tribological and Mechanical Properties Al2O3–Sic Reinforced Al Composites Manufactured by Casting or P/M Method, Materials and Design 29 (2008) 2002–2008.

[18] Hajar Farajzadeh Dehkordi; Mohammad Reza Toroghinejad; KeyvanRaeissi, Fabrication of Al/Al2O3/TiC Hybrid Composite by Anodizing and Accumulative Roll Bonding Processes and Investigation of Its Microstructure and Mechanical Properties, Material Science and Engineering, A585 (20134) 60-467.

[19] A. Baradeswaran, S.C. Vettivel, A. ElayaPerumal, N. Selvakumar, R. Franklin Issac, Experimental Investigation on Mechanical Behavior, Modeling and Optimization of Wear Parameters of B_4C and Graphite Reinforced Aluminium Hybrid Composites,Materials and Design 63 (2014) 620–632.

[20] Bijay Kumar Show; Dipak Kumar Mondal; KoushikBiswas; JoydeepMaity, Development of a Novel 6352 Al (Al_4SiC_4+Sic) Hybrid Composite with Enhanced Mechanical Properties, Material Science and Engineering; A 579 (2013) 136-149.